



TOUCH MONITOR



MONITOR



OPEN FRAME



TOUCH SCREEN



DIGITAL SIGNAGE



TOUCH TABLE



FLOOR STANDING




VIDEO WALL

www.worldtradedisplay.com

OPEN FRAME

Open Frame Industrial Solutions – MIX Embedded Series

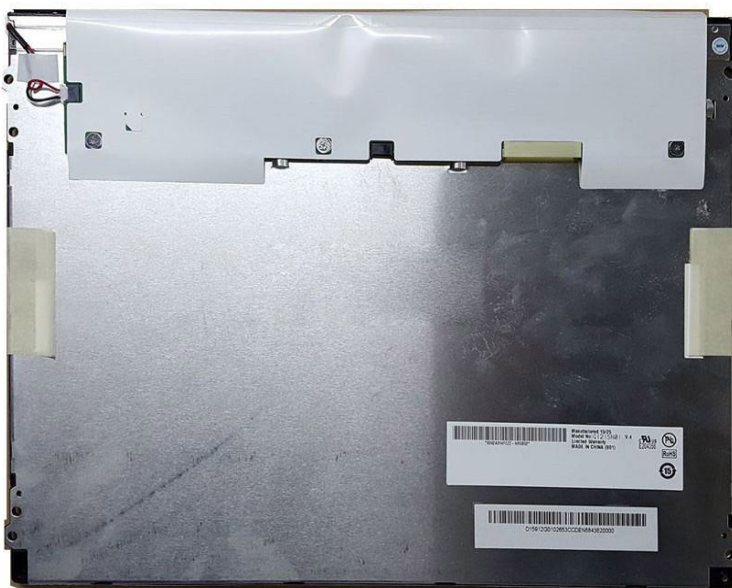

Wide Range, Easy & Accurate

Make your choice from various interactive display, videowall & digital signage discovering the multi-touch technology.

All in One Solutions

WTD solutions available also with Android/PC included, to satisfy the space & performances requests in only one item.

Common Scenarios

Innovative communicative creativity, conceived & designed to meet different needs in the outdoor/indoor environments.

Benefits

Wide range of dimensions designed to cover all the most common usage scenarios in the professional markets, where it's also required high brightness or protection against high temperatures, thanks to our wide range of products such as videowall, open frame, touch display & digital signage solutions.

Display & Digital Signage Solutions

FEATURES	REMARKS	SPECIFICATIONS
Display	Type of product	Open Frame
	Panel Size available	10.4"/12.1"
	Active Area	10.4" 211 x 158 mm 4:3 800 x 600
	Aspect Ratio	12.1" 246 x 185 mm 4:3 800 X 600
	Resolution	
	Brightness	230/ 300 cd/m2 (Range)
	Colors	16.7 million
	Viewing Angle	Horizontal (left/right): 130°/ Vertical (up/down): 110°/ 160°/
	Response Time (Pixel)	25/ 10 ms (Range)
	Contrast Ratio	400:1/ 700:1 (Range)
	Input Video Format	RGB Analog/ DVI Digital
	Input Video Signal	VGA/ DVI-D/ HDMI
	Input Frequency	Horizontal: 30 - 82 kHz Vertical: 60 - 75 Hz
	OSD	Control (Back): Menu, Up, Down, Auto, Power
	High Brightness	No
High 4K Resolution	No	
Double Display	No	
PC Functions	CPU	-
	RAM	-
	SSD	-
	Connections	-
	Media Player	-
	System OS	-
	Android	-
	OPS Module Slot	-
	Other Function	-
Touch Functions	Technology	-
	Point	-
	Interface	-
	Surface Hardness	-
	Resolution	-
	Response Time	-
	Input Method	-
Connectivity	Interface	VGA, DVI-D, HDMI
	Speaker	-
Function Conditions	Relative Humidity	Operating: 20% ~ 80% Storage: 10% ~ 90%
	Temperature Range	Operating: 0° ~ 40°C Storage: -20° ~ 60°C
	Screen Position	Landscape (Default) or Portrait
Mechanical	Installation (VESA)	75 x75 Side/ 75 x 100 Side/ 100 x 100 Side/
	Sheel Material	Aluminium frame and body
	Glass	-
	Enclosure Color	Silver Frame

FEATURES	REMARKS	SPECIFICATIONS
Power & Accessory	Power Supply	AC 100-240V Input DC 12V, 24V 50/60 Hz
	Power Cons. (Max)	15W/ 30W (Range)
	Cables	Power Supply with Cable Schuko
	Input Connector	AC: Cable Power Schuko
Packaging	Dimension (Net) (L x W x H) Weight (Single)	10.4" 236 x 5.6 x 177 mm 0.8 Kg 12.1" 279 x 5.7 x 209 mm 1.2 Kg
	Carton Dimension (L x W x H)	On Demand
Policy	Warranty	2 Years (Panel 1 Year)
	Agency Approval	CE - FCC - CCC
Other/ Upgrade	Extra Time Warranty	Please contact us if you need more informations
	Different Version	Available also with High Brightness and other kind od panel Special mechanical design/ style guarantee overtime Slim design to fit your kiosk easy way
	Notes	Panel specification above comes from typical panel and for reference only, please contact our sales for the final confirmation, if needed.