


Tolerance ±1mm

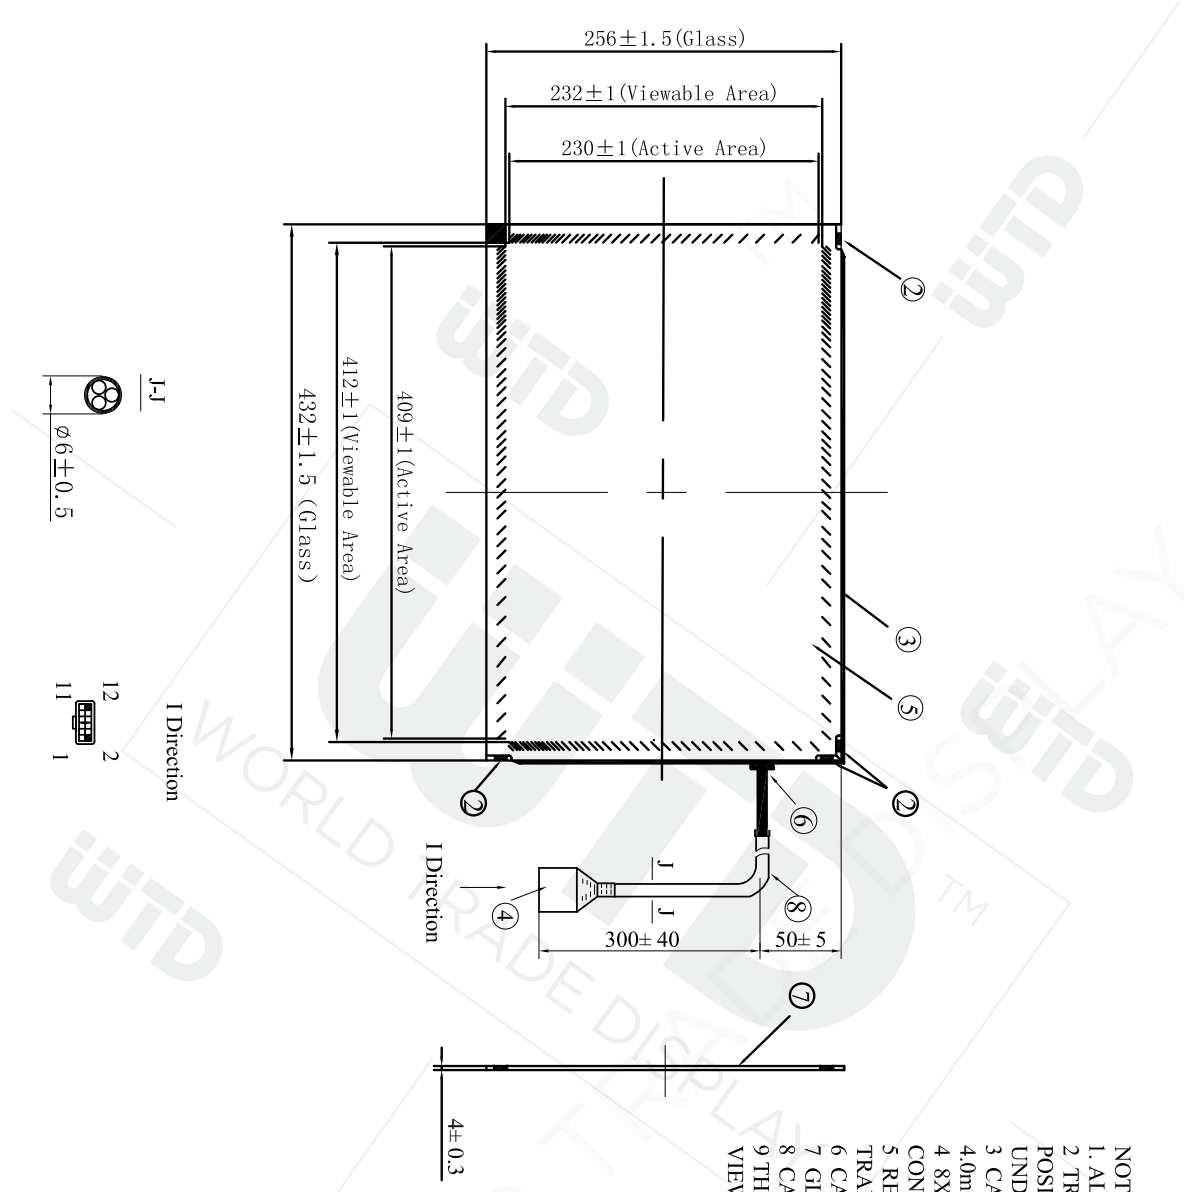

- NOTES**
1. ALL DIMENSION ARE IN MILLIMETERS.
  2. TRANSDUCERS ARE LOCATED AT THE POSITIONS SHOWN. GLASS IS BEVELED UNDER THE TRANSDUCERS.
  3. CABLE ROUTING ADDS A MAXIMUM OF 4.0mm TO INDICATED SECTION OF SCREEN.
  4. 8X19 HOUSING MATES WITH CONTROLLER.
  5. REFLECTONAL ARRAY AND 2 TRANSDUCER ON THE FRONT OF THE GLASS.
  6. CABLE CLIP, MATERIAL: METAL.
  7. GLASS BOARD.
  8. CABLE, OUTER LAYER MATERIAL: PVCBG01.
  9. THE TOUCH ACTIVE AREA IS LESS THAN THE VIEWABLE AREA TO FACILITATE SEALING.

CONNECTION CHART		INSUTLATION COLOR OVERALL SHIELD
PN	SIGNAL	
1	GND	
2	KEY	BLUE
3	Y-in2	BLUE
4	Yout	BLACK
5	Y-in1	YELLOW
6	GND	
7	GND	
8	GND	GREEN
9	X-in2	WHITE
10	Xout	RED
11	X-in1	RED
12	KEY	